

# CPSC 317 COMPUTER NETWORKING

Module 2: Network Performance – Day 2 – Delay

1

# READING

- Reading: 1.4

# ADMINISTRATION

- Programming Assignment 1 is on-going
- Quiz 1 will be the week of January 29<sup>th</sup>

# LEARNING GOALS

## Delay

- List and define the types of delay and how they contribute to over-all delay
- Calculate the end-to-end delay in a network.
- Perform bottleneck analysis on a path
- Compute traffic intensity and relate traffic intensity to queuing delays
- Calculate link utilization
- Use the formula of Average Delay =  $S/(1-U)$  where  $U$  is the network utilization and  $S$  is the average service time for a single packet (this formula only applies to randomly arriving packets)

# RECAP

- Bandwidth
- Latency
- RTT (Round Trip Time)
- Jitter
- Throughput
- Goodput

# CLICKER QUESTION

If lightning happens 1km from me, it takes about 3 seconds for me to hear the thunder. What time is that?

- A. Latency
- B. RTT
- C. Bandwidth
- D. Throughput
- E. Goodput


# CLICKER QUESTION

Suppose you have a 5 Gbyte movie that you want to download on a 100Mbps link. How long will it take (rounded to the nearest second)? Assume 75Mbps goodput.

- A. 572 seconds
- B. 533 seconds
- C. 66 seconds
- D. 50 seconds
- E. None of the above

# BOTTLENECKS

- What is the maximum throughput possible (bandwidth) between two nodes connected by a network?
  - Can traffic flow at maximum bandwidth in all links?

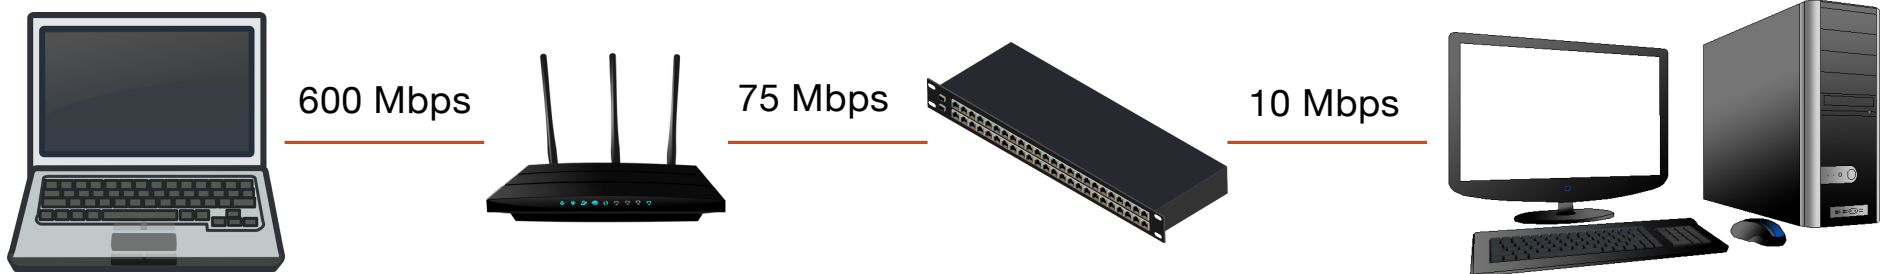





# TYPES OF DELAY

- **Processing delay:** examine packet to decide where to direct it
- **Queueing delay:** waiting time to get access to the link
- **Transmission delay:** time to actually write the packet onto the medium
- **Propagation delay:** time spent to move each bit from source to destination on the transmission medium
- **End-to-end delay:** sum of all sources of delay

# TYPES OF DELAY

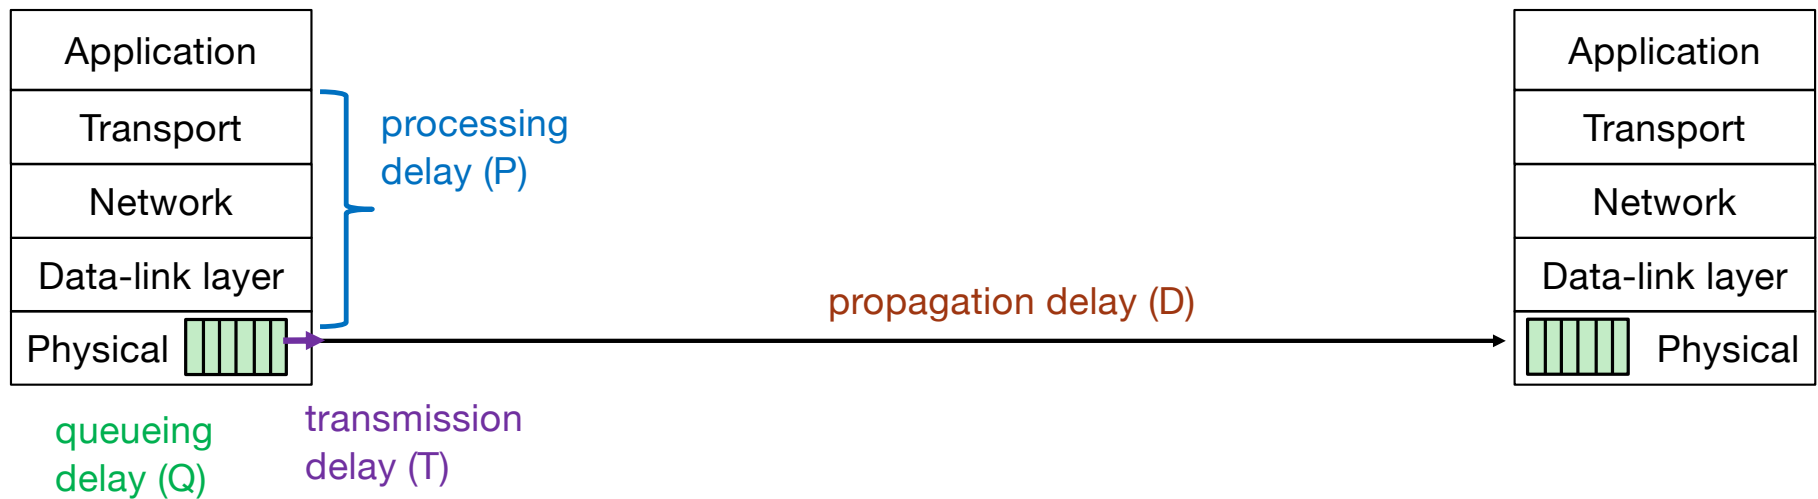

# TYPES OF DELAY

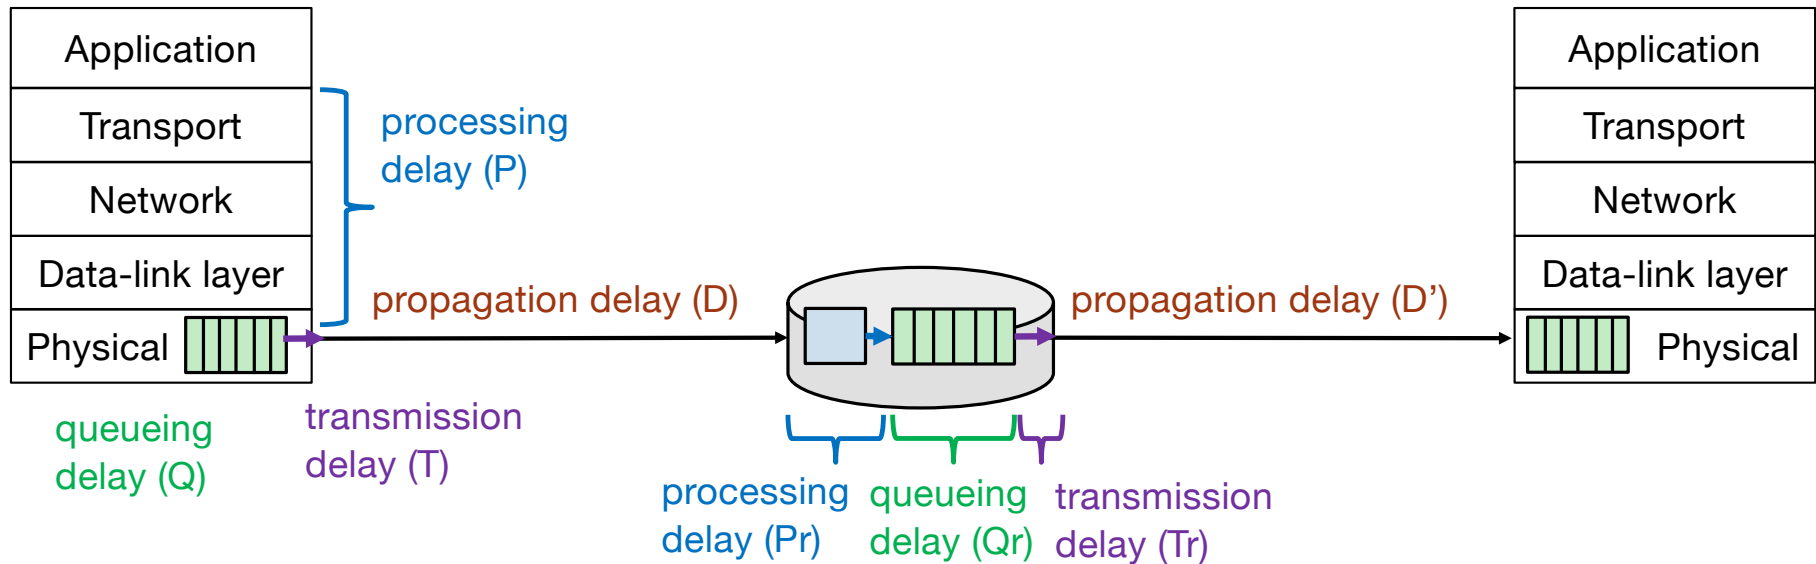

# CLASSIFICATION OF DELAY: FIXED VS VARIABLE

- ***Processing delay:*** fixed or variable?
- ***Queueing delay:*** fixed or variable?
- ***Transmission delay:*** fixed or variable?
- ***Propagation delay:*** fixed or variable?
- ***End-to-end delay:*** fixed or variable?

# CLASSIFICATION OF DELAY: FIXED VS VARIABLE

- ***Processing delay:*** fixed (essentially)
- ***Queueing delay:*** fixed or variable?
- ***Transmission delay:*** fixed or variable?
- ***Propagation delay:*** fixed or variable?
- ***End-to-end delay:*** fixed or variable?

# CLASSIFICATION OF DELAY: FIXED VS VARIABLE

- ***Processing delay:*** fixed (essentially)
- ***Queueing delay:*** variable
- ***Transmission delay:*** fixed or variable?
- ***Propagation delay:*** fixed or variable?
- ***End-to-end delay:*** fixed or variable?

# CLASSIFICATION OF DELAY: FIXED VS VARIABLE

- ***Processing delay:*** fixed (essentially)
- ***Queueing delay:*** variable
- ***Transmission delay:*** fixed (bit) variable (packet)
- ***Propagation delay:*** fixed or variable?
- ***End-to-end delay:*** fixed or variable?

# CLASSIFICATION OF DELAY: FIXED VS VARIABLE

- ***Processing delay:*** fixed (essentially)
- ***Queueing delay:*** variable
- ***Transmission delay:*** fixed (bit) variable (packet)
- ***Propagation delay:*** fixed (metre) variable (location)
- ***End-to-end delay:*** fixed or variable?



# CLASSIFICATION OF DELAY: FIXED VS VARIABLE

- ***Processing delay:*** fixed (essentially)
- ***Queueing delay:*** variable
- ***Transmission delay:*** fixed (bit) variable (packet)
- ***Propagation delay:*** fixed (metre) variable (location)
- ***End-to-end delay:*** variable

# SUPPOSE ...

*You are sending the same sized packets to the same destination over and over again.*

- **Processing delay:** ?
- **Queueing delay:** ?
- **Transmission delay:** ?
- **Propagation delay:** ?
- **End-to-end delay:** ?

# SUPPOSE ...

*You are sending the same sized packets to the same destination over and over again.*

- ***Processing delay:*** fixed
- ***Queueing delay:*** variable
- ***Transmission delay:*** fixed
- ***Propagation delay:*** fixed
- ***End-to-end delay:*** variable

# DELAY CALCULATIONS – PROPAGATION

You are designing a satellite network. The satellites are 750km from the surface of the earth. The speed of light is  $3 \times 10^8$  metres per second. Packets are 1250 bytes. **What is the two-way propagation delay?**

# DELAY CALCULATIONS – TRANSMISSION

You are designing a satellite network. The satellites are 750km from the surface of the earth. The speed of light is  $3 \times 10^8$  metres per second. Packets are 1250 bytes. The network has a transfer rate of 100Mbps. **What is the transmission delay (one-way)?**

# DELAY CALCULATIONS — END-TO-END

You are designing a satellite network. The satellites are 750km from the surface of the earth. The speed of light is  $3 \times 10^8$  metres per second. Packets are 1250 bytes. The network has a transfer rate of 100Mbps. Assume the transmission delay for the ACK is 0ms, and that the processing and queueing delays are 0. **What is the total round-trip delay for one packet?**

# MORE CALCULATIONS – THROUGHPUT

You are designing a satellite network. The satellites are 750km from the surface of the earth. The speed of light is  $3 \times 10^8$  metres per second. Packets are 1250 bytes. The network has a transfer rate of 100Mbps. Assume that the processing and queueing delays are 0. Assume also that you can transmit packets back-to-back. **What is the throughput?**

# MORE CALCULATIONS – THROUGHPUT


You are designing a satellite network. The satellites are 750km from the surface of the earth. The speed of light is  $3 \times 10^8$  metres per second. Packets are 1250 bytes. The network has a transfer rate of 100Mbps. Assume that the processing and queueing delays are 0. Assume also that you don't transmit the  $n+1^{\text{th}}$  packet until you get a (very short) ACK for the  $n^{\text{th}}$  packet (assume 0ms transmission delay for the ACK). **What is the throughput?**



# TRAFFIC INTENSITY

- How much data is arriving at the router?
- How much data can a router handle?
  - At what rate can the router forward data out?
- Queueing: when a router receives data faster than it can forward it

# TRAFFIC INTENSITY

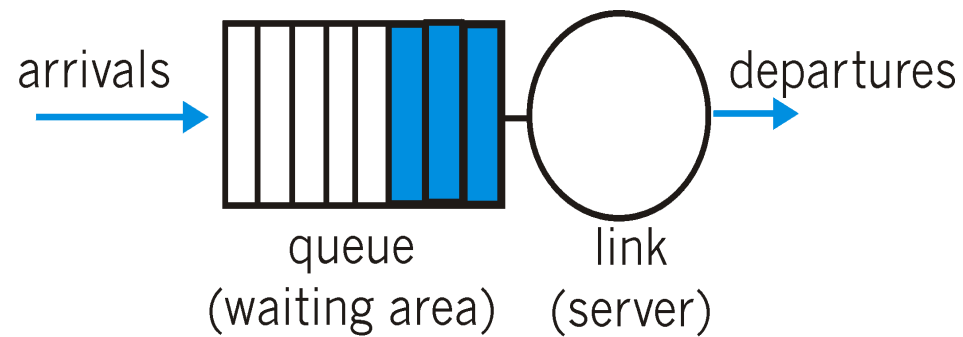

Arrival Rate of 100 packets/second

Packets depart every 1 millisecond

# TRAFFIC INTENSITY CALCULATION

- Traffic intensity is determined by
  - Number of packets arriving per second ( $a$ )
  - Average packet size ( $L$ ) in bits
  - Transmission rate: rate at which bits are disposed off per second ( $R$ )
- Traffic intensity:  $La/R$
- Example:
  - Suppose a router is connected to a 1Mbps link. The router receives an average of 100 packets per second, averaging 500 bytes per packet. What is the traffic intensity?

# CLICKER QUESTION

Suppose a router is connected to a 1Mbps link. The router receives an average of 100 packets per second, averaging 500 bytes per packet. What is the traffic intensity?

- A. 0.05
- B. 0.125
- C. 0.2
- D. 0.4
- E. 0.8

# TRAFFIC INTENSITY RATIONALE

- Traffic intensity helps us understand how busy a link is
- Queueing delay is related to the intensity
  - Queueing delay is delay caused by waiting for the queue to clear
  - Packets arriving must wait for packets already there to leave

# TRAFFIC INTENSITY VS QUEUEING DELAY

- Suppose  $La$  bits/second arrive randomly for an outgoing link in a router
- Suppose that the router can transmit  $R$  bits/second
- Draw a graph of queueing delay vs traffic intensity
  - What does  $La = R$  mean?
  - What does  $La > R$  mean?
  - What does  $La < R$  mean?
  - What does  $La \ll R$  mean?

# QUEUEING PROBLEM

- Packets are not spaced out evenly
  - Spacing between packets is not deterministic
- Packets may not be served evenly
  - Link may be busy at times
  - Particularly for shared medium (e.g., radio signals)
- Higher intensity means higher probability that there is one or more packets in the queue

# TRAFFIC INTENSITY VS QUEUEING DELAY

- Assuming packets arrive at an exponential distribution, delay is given by:


$$Delay = \frac{S}{1 - U}$$

- Where:
  - $S$  is average service time when server is idle
  - $U$  is server utilization (usually traffic intensity)
- Queueing delay is then:

$$Queueing\ delay = \frac{S}{1 - U} - S \text{ or } \frac{US}{1 - U}$$



# DELAY VS UTILIZATION

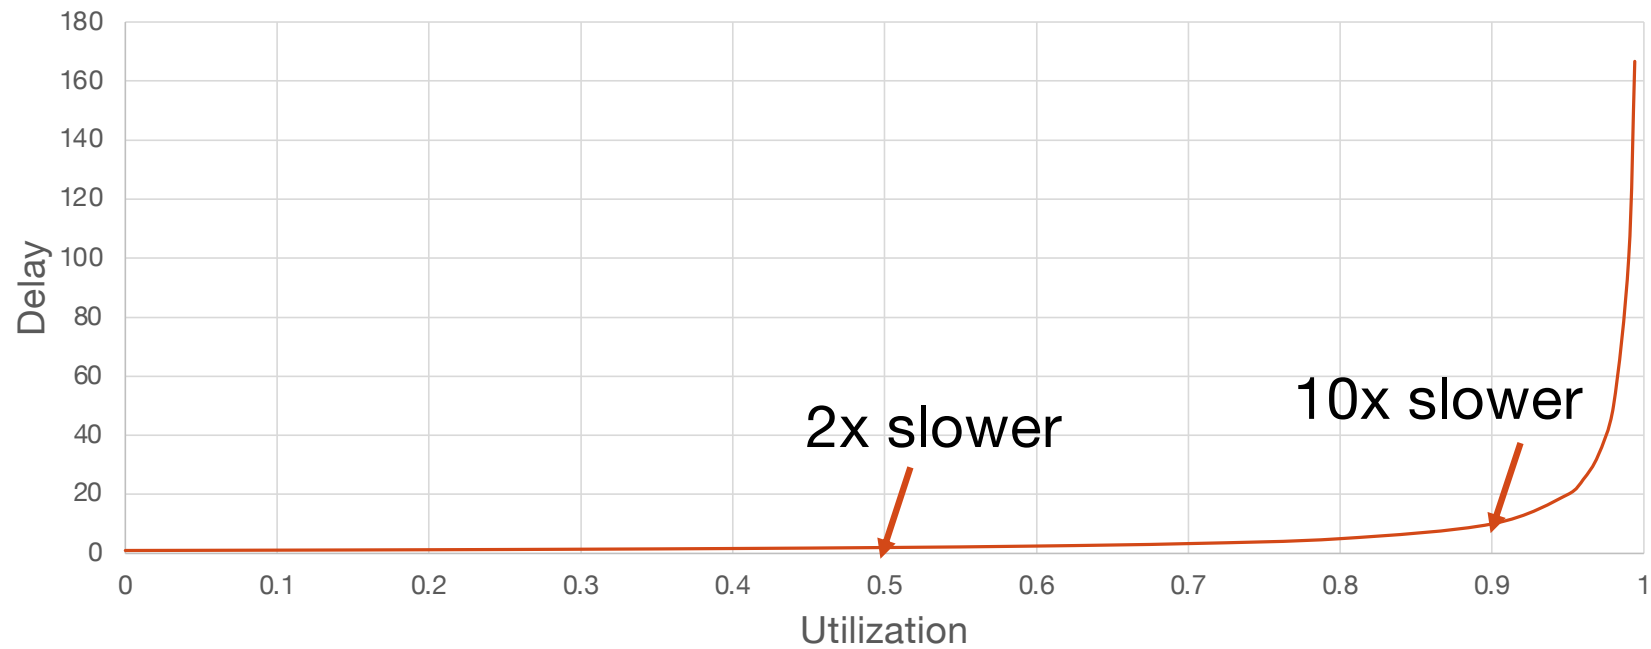

# SOME OBSERVATIONS

- Routers don't have infinite buffer space
- If packets arrive faster than they can be disposed off, they may have to be dropped
- Packets may also be corrupted in transit
  - These packets must be discarded, since their content is no longer valid
  - Even routing information (e.g., destination IP) may be corrupted

# IN-CLASS ACTIVITY

- ICA22