



The Rendering Pipeline – A First Look

© Wolfgang Heidrich

Your Tasks Until Monday



Assignment 0

- Refresher of linear algebra
- Set up programming environment on lab computers

Labs start this week!

- TAs can help with computer setup for A0


Reading (in Shirley: Introduction to CG)

- Math refresher: Chapters 2, 4
 - *Optional (for now):* 2.5-2.9
- Background on graphics: Chapter 1

Wolfgang Heidrich



The Rendering Pipeline

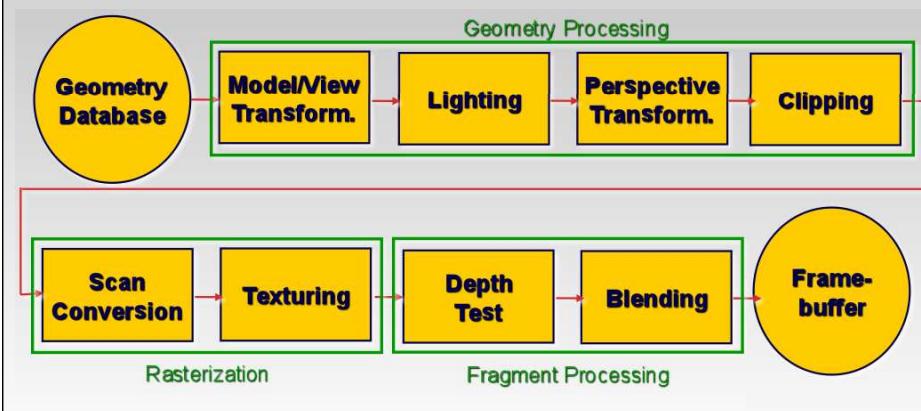

Wolfgang Heidrich



The Rendering Pipeline

What is it? All of this:

- Abstract model for sequence of operations to transform a geometric model into a digital image
- An abstraction of the way graphics hardware works
- The underlying model for application programming interfaces (APIs) that allow the programming of graphics hardware
 - OpenGL
 - Direct 3D

Actual implementations of the rendering pipeline will vary in the details

Wolfgang Heidrich



Rendering Pipeline

Advantages of a pipeline structure

- Logical separation of the different components, modularity
- Easy to parallelize:
 - *Earlier stages can already work on new data while later stages still work with previous data*
 - *Similar to pipelining in modern CPUs*
 - *But much more aggressive parallelization possible (special purpose hardware!)*
 - *Important for hardware implementations!*
- Only local knowledge of the scene is necessary

Wolfgang Heidrich



Rendering Pipeline


Disadvantages:

- Limited flexibility
- Some algorithms would require different ordering of pipeline stages
 - *Hard to achieve while still preserving compatibility*
- Only local knowledge of scene is available
 - *Shadows*
 - *Global illumination*

Wolfgang Heidrich



The Rendering Pipeline

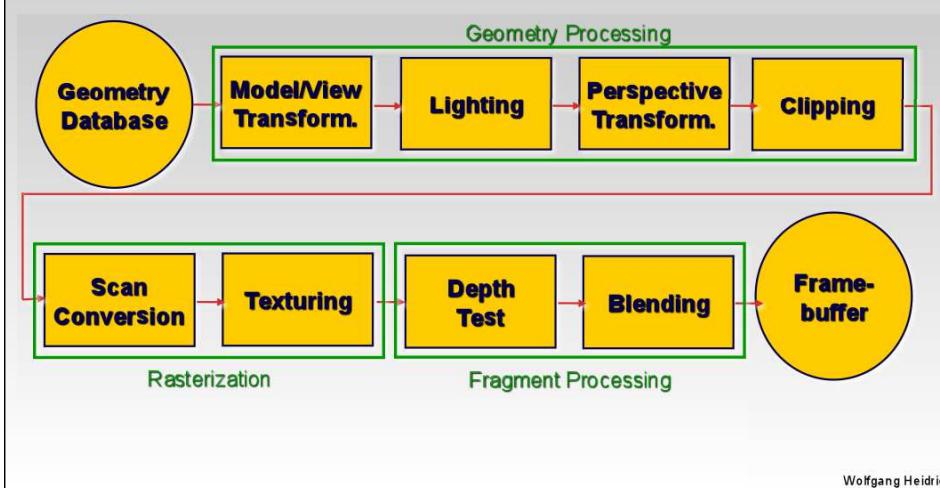

Geometry Database

Needs to represent models for

- Geometric primitives
- Relations between different primitives (transformations)
- Object materials
- Light sources
- Camera

Wolfgang Heidrich



Geometric Primitives

Different philosophies:

- Collections of complex shapes
 - *Spheres, cones, cylinders, tori, ...*
- One simple type of geometric primitive
 - *Triangles or triangle meshes*
- Small set of complex primitives with adjustable parameters
 - *E.g. "all polynomials of degree 2"*
 - *Splines, NURBS (details in CPSC 424)*
 - *Fractals*

Wolfgang Heidrich



Geometric Primitives

Mathematical representations:

- Explicit functions
- Parametric functions
- Implicit functions

Wolfgang Heidrich



Explicit Functions

Curves:

- y is a function of x : $y := \sin(x)$
- Only works in 2D

Surfaces:

- z is a function of x and y : $z := \sin(x) + \cos(y)$
- Cannot define arbitrary shapes in 3D

Wolfgang Heidrich



Parametric Functions

Curves:

- 2D: x and y are functions of a parameter value t
- 3D: x , y , and z are functions of a parameter value t

$$C(t) := \begin{pmatrix} \cos(t) \\ \sin(t) \\ t \end{pmatrix}$$

Wolfgang Heidrich



Parametric Functions

Surfaces:

- Surface S is defined as a function of *parameter values* s, t
- *Names of parameters can be different to match intuition:*

$$S(\phi, \theta) := \begin{pmatrix} \cos(\phi) \cos(\theta) \\ \sin(\phi) \cos(\theta) \\ \sin(\theta) \end{pmatrix}$$

Wolfgang Heidrich



Geometry Database

Implicit Surfaces:


- Surface is defined implicitly via the roots of a function
- E.g.: $S(x, y, z) : x^2 + y^2 + z^2 - 1 = 0$

Wolfgang Heidrich



Geometry Database


Triangles and Triangle Meshes:

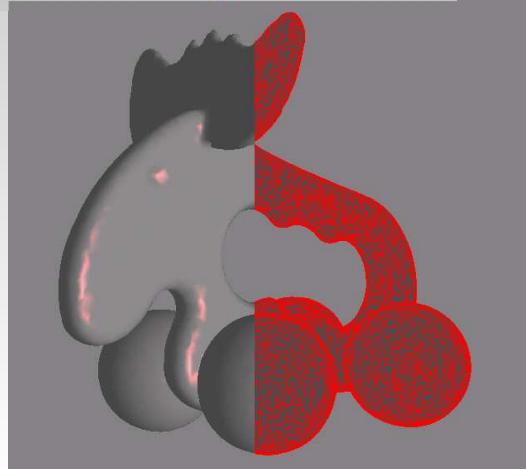

Wolfgang Heidrich



The Rendering Pipeline

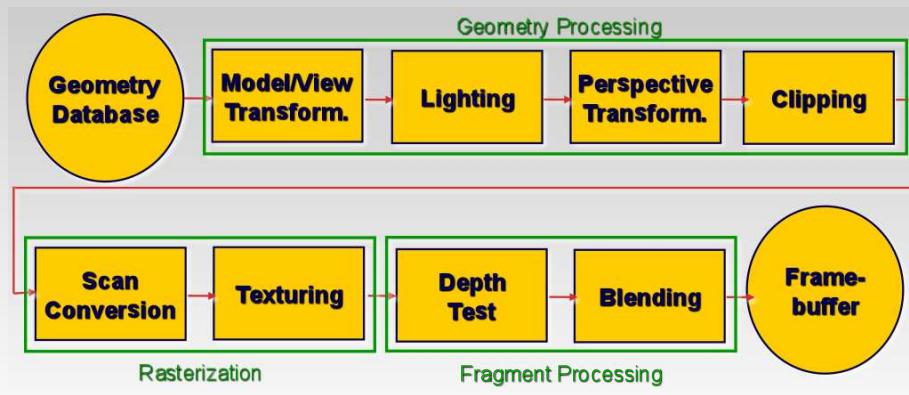

Wolfgang Heidrich

Modeling and Viewing Transformation



Modeling transformation:


- Map points from *object coordinate system* to *world coordinate system*
- Same as placing objects

Viewing transformation:

- Map points from *world coordinate system* to *camera (or eye) coordinate system*
- Same as placing camera


Wolfgang Heidrich

Modeling Transformation: Object Placement

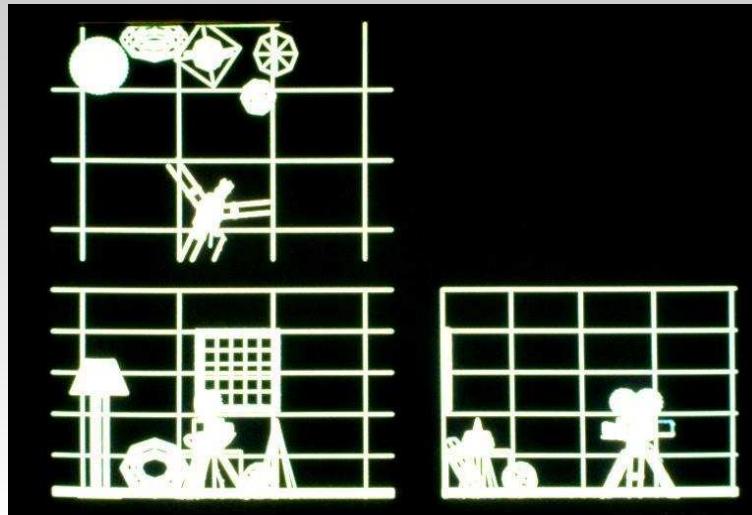

Wolfgang Heidrich

Viewing Transformation: Camera Placement

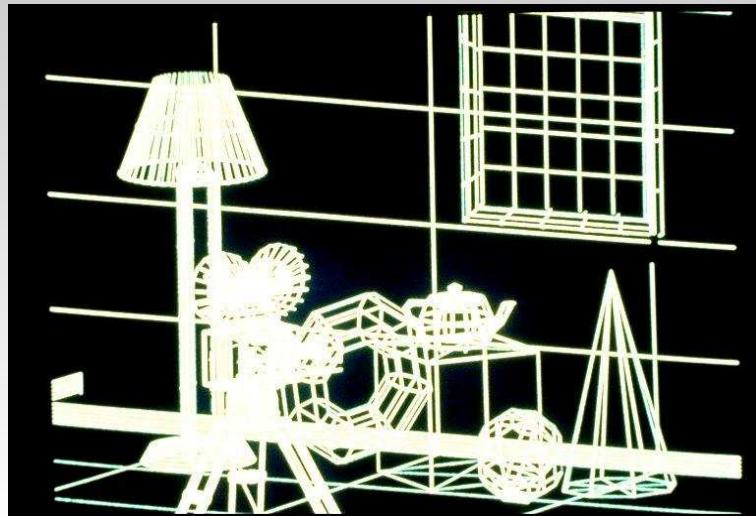


Wolfgang Heidrich

Modeling and Viewing Transformation



Types of transformations:


- Rotations, scaling, shearing



- Translations



- Other transformations (not handled by rendering pipeline):



Wolfgang Heidrich

Modeling and Viewing Transformation



Linear transformations

- Rotations, scaling, shearing
- Can be expressed as a 3×3 matrix
- E.g. rotation:

$$\begin{pmatrix} x' \\ y' \\ z' \end{pmatrix} = \begin{pmatrix} \cos(\phi) & -\sin(\phi) & 0 \\ \sin(\phi) & \cos(\phi) & 0 \\ 0 & 0 & 1 \end{pmatrix} \cdot \begin{pmatrix} x \\ y \\ z \end{pmatrix}$$

Wolfgang Heidrich

Modeling and Viewing Transformation



Affine transformations

- Linear transformations + translations
- Can be expressed as a 3×3 matrix + 3 vector
- E.g. rotation + translation:


$$\begin{pmatrix} x' \\ y' \\ z' \end{pmatrix} = \begin{pmatrix} \cos(\phi) & -\sin(\phi) & 0 \\ \sin(\phi) & \cos(\phi) & 0 \\ 0 & 0 & 1 \end{pmatrix} \cdot \begin{pmatrix} x \\ y \\ z \end{pmatrix} + \begin{pmatrix} t_x \\ t_y \\ t_z \end{pmatrix}$$

- Another representation: *4x4 homogeneous matrix*


Wolfgang Heidrich



The Rendering Pipeline

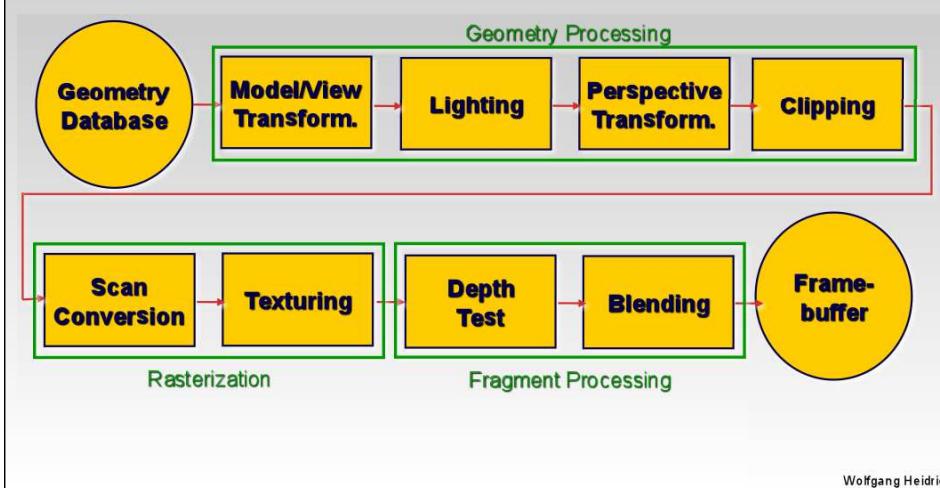

Lighting

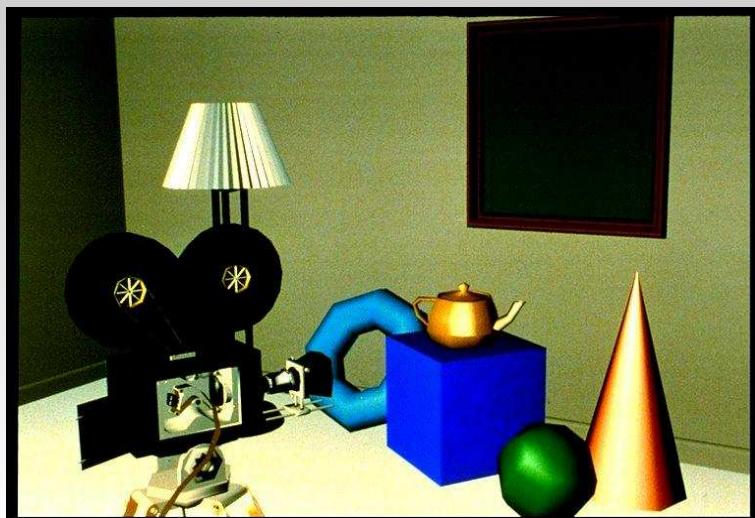

Wolfgang Heidrich




Complex Lighting and Shading



Wolfgang Heidrich



The Rendering Pipeline

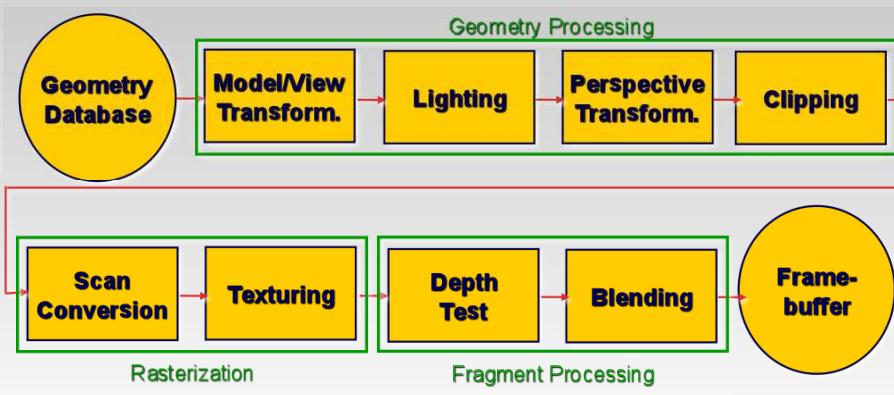

Wolfgang Heidrich



Perspective Transformation

Purpose:

- Project 3D geometry onto a 2D image plane
- Simulates a camera


Camera model:

- Pinhole camera
- Other, more complex camera models also exist in computer graphics, but are less common
 - *Thin lens cameras*
 - *Full simulation of lens geometry*

Wolfgang Heidrich



Perspective Projection

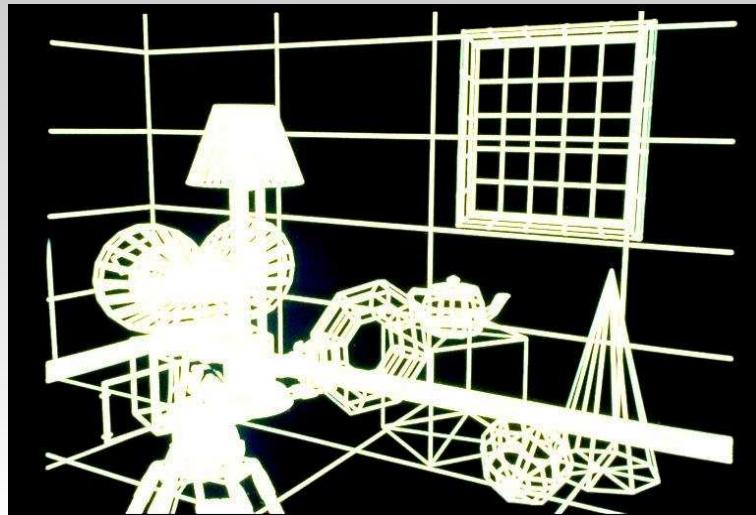


Wolfgang Heidrich



Perspective Transformation

Pinhole Camera:

- Light shining through a tiny hole into a dark room yields upside-down image on wall

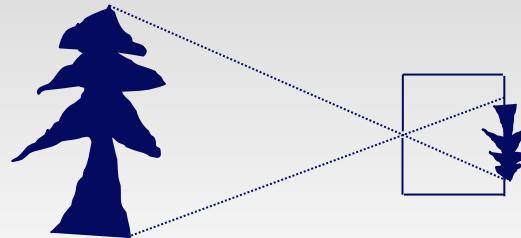

Wolfgang Heidrich



Perspective Transformation

Pinhole Camera



Wolfgang Heidrich

Pinhole Camera - Camera Obscura



Wolfgang Heidrich

Perspective Transformation

In computer graphics:

- Image plane is conceptually *in front* of the center of projection




- Perspective transformations belong to a class of operations that are called *projective transformations*
- Linear and affine transformations also belong to this class
- All projective transformations can be expressed as 4×4 matrix operations


Wolfgang Heidrich



The Rendering Pipeline

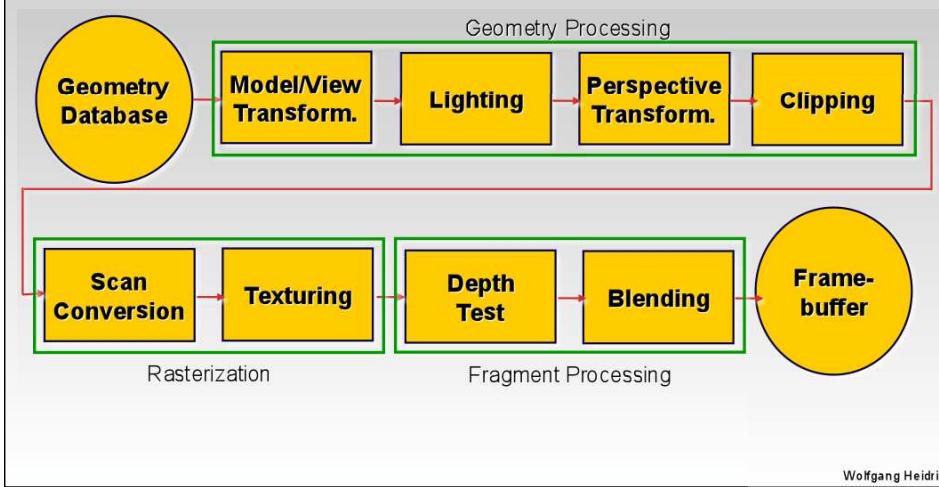


Scan Conversion

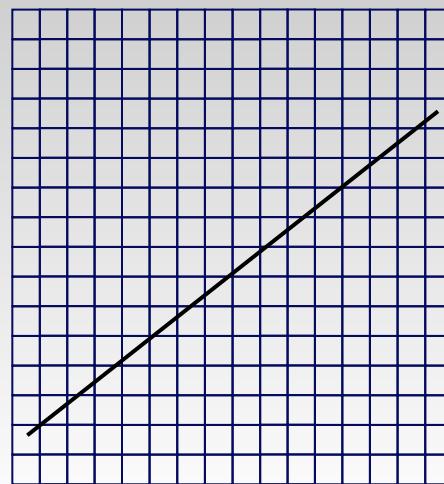

Wolfgang Heidrich



Scan Conversion

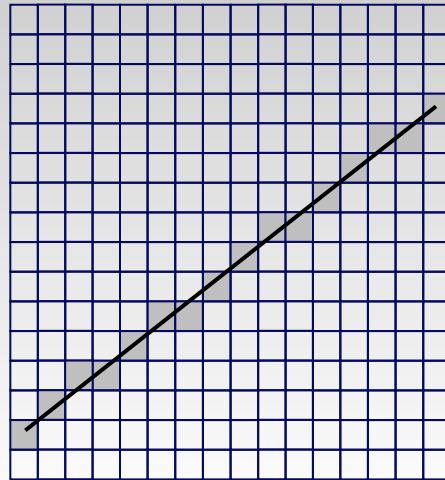

Wolfgang Heidrich



Scan Conversion


Problem:

- Line is infinitely thin, but image has finite resolution
- Results in steps rather than a smooth line
 - *Jaggies*
 - *Aliasing*
- One of the fundamental problems in computer graphics

Wolfgang Heidrich



Scan Conversion

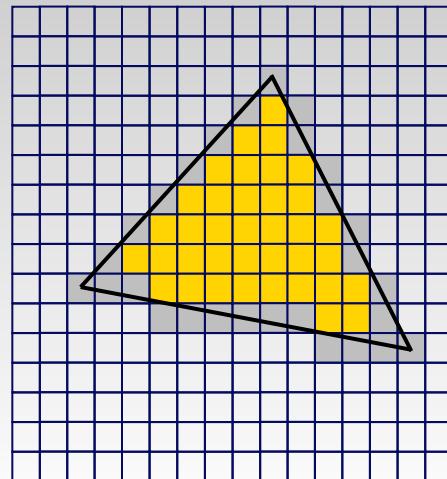


Wolfgang Heidrich



Scan Conversion

Color interpolation

- Linearly interpolate per-pixel color from vertex color values
- Treat every channel of RGB color separately





Wolfgang Heidrich



Scan Conversion

Color interpolation


- Example:

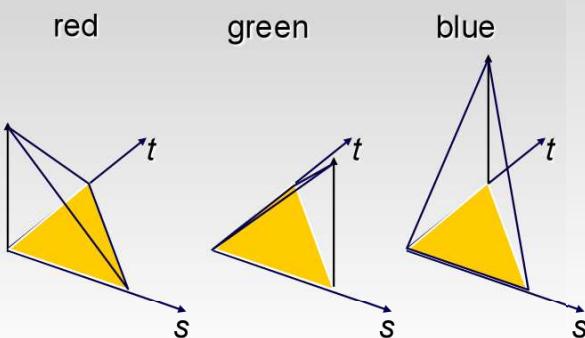

Wolfgang Heidrich




The Rendering Pipeline

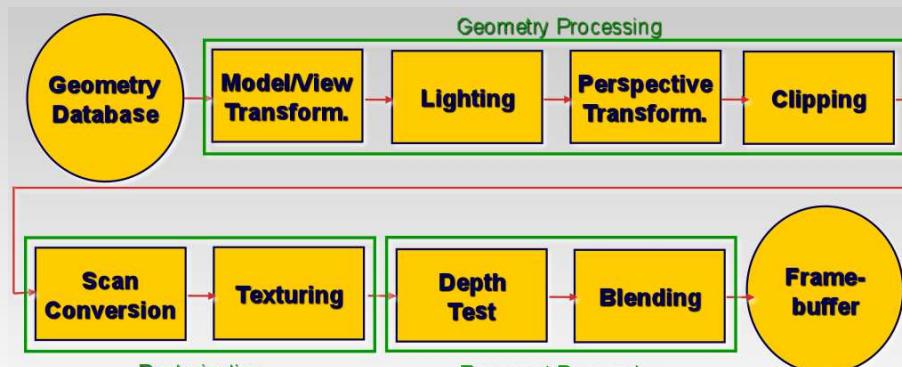

Wolfgang Heidrich



Texturing

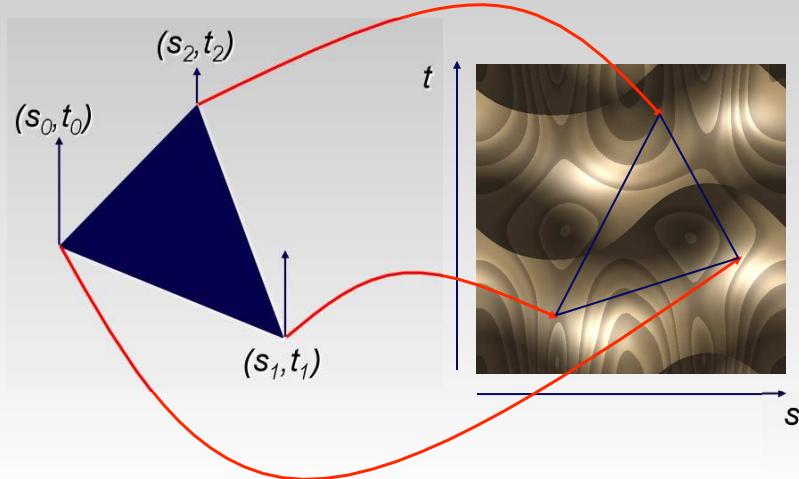

Wolfgang Heidrich



Texture Mapping



Wolfgang Heidrich



Displacement Mapping



Wolfgang Heidrich



Reflection Mapping



Wolfgang Heidrich



Texturing


Issues:

- How to map pixel from texture (*texels*) to screen pixels
 - *Texture can appear widely distorted in rendering*
 - *Magnification / minification of textures*
- Filtering of textures
- Preventing aliasing (anti-aliasing)

Wolfgang Heidrich




The Rendering Pipeline

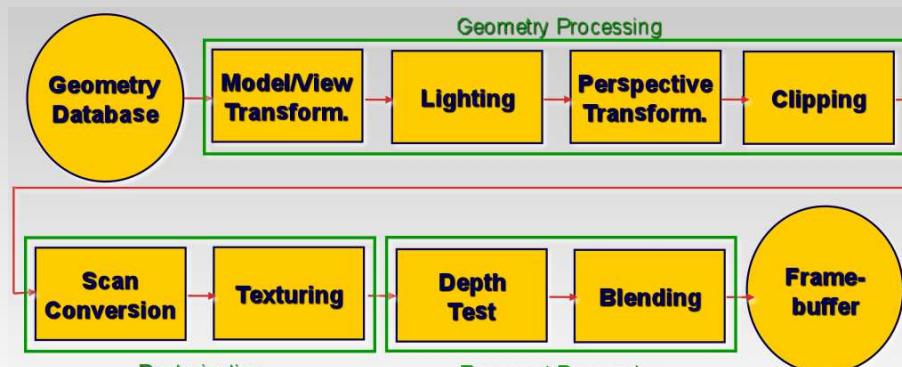

Wolfgang Heidrich



Without Hidden Line Removal

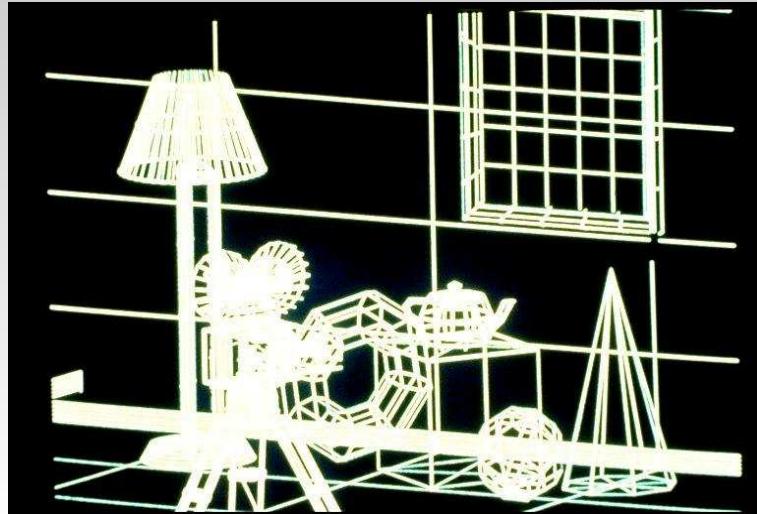

Wolfgang Heidrich




Hidden Line Removal



Wolfgang Heidrich



Hidden Surface Removal

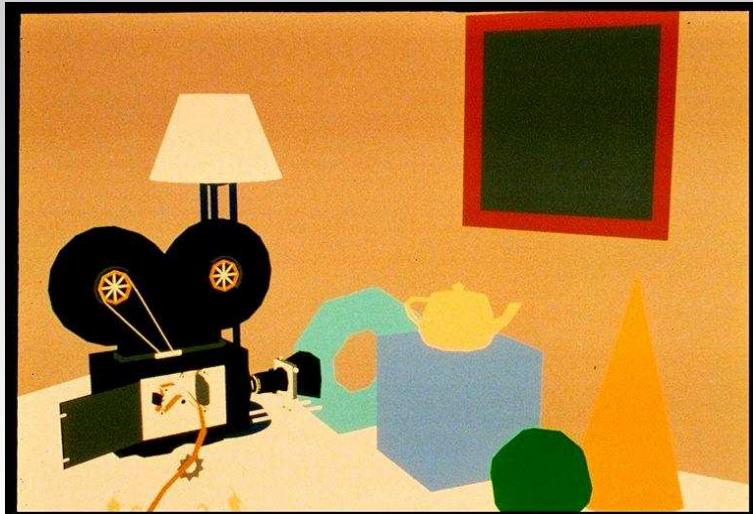

Wolfgang Heidrich

Depth Test / Hidden Surface Removal



Remove invisible geometry

- Parts that are hidden behind other geometry

Possible Implementations:

- Per-fragment decision
 - *Depth buffer*
- Object space decision
 - *Clipping polygons against each other*
 - *Sorting polygons by distance from camera*


Wolfgang Heidrich

Depth Test / Hidden Surface Removal



Wolfgang Heidrich

The Rendering Pipeline

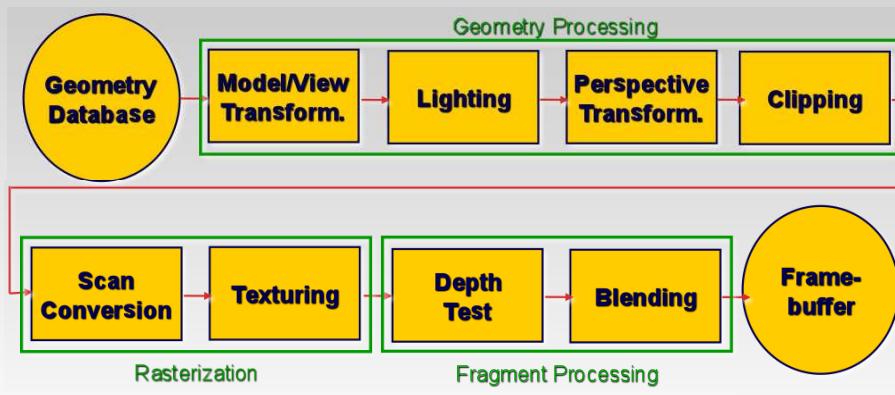


Wolfgang Heidrich



Display Technology

Cathod Ray Tubes (CRTs)

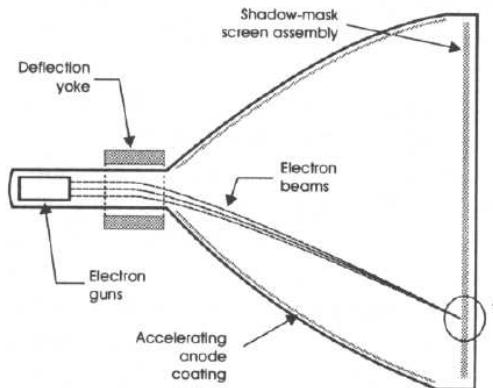


Wolfgang Heidrich



Display Technology

Raster Scan Electron Beam

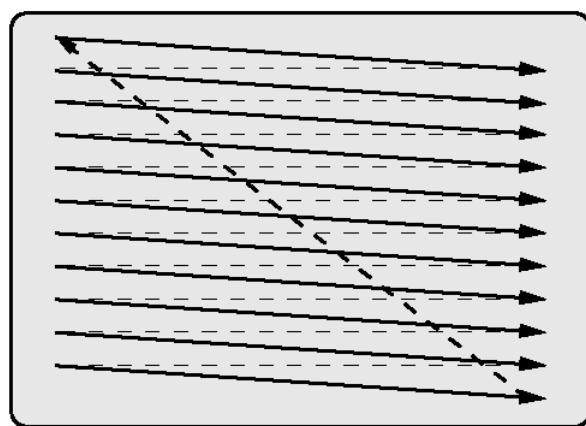


Wolfgang Heidrich



Display Technology

Interlaced Scanning

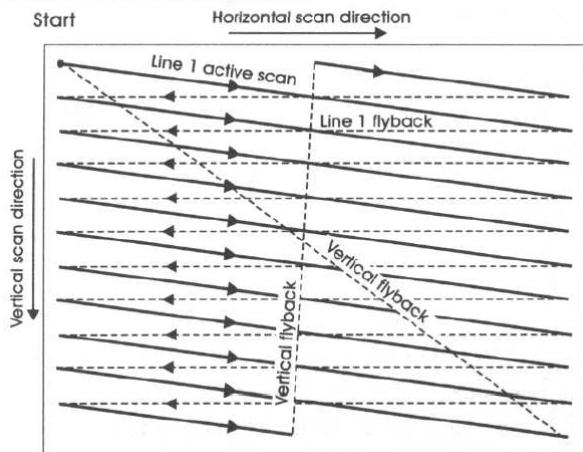


Wolfgang Heidrich



Display Technology

Color CRTs

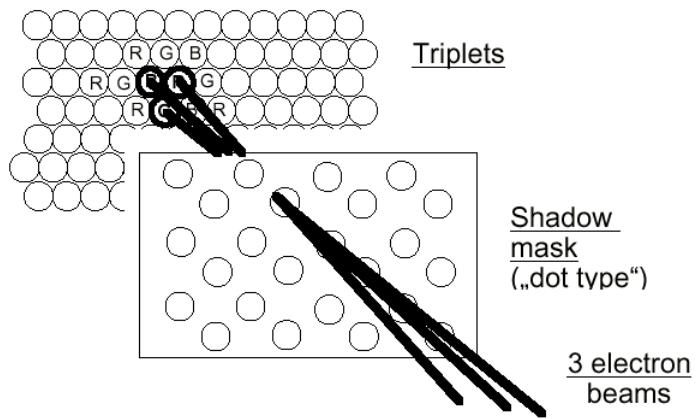


Wolfgang Heidrich



Display Technology

Trinitron CRTs

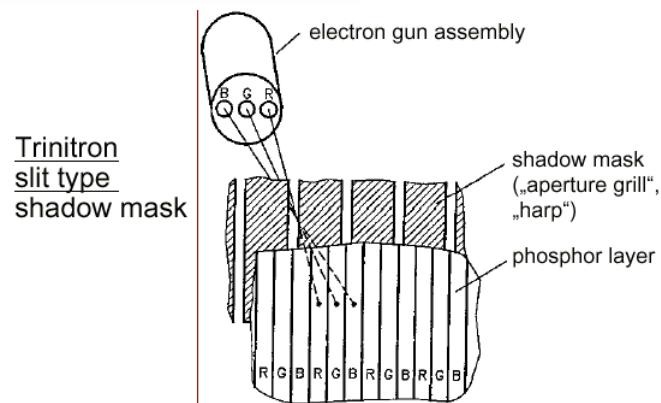


Wolfgang Heidrich



Display Technology


Liquid Crystal Displays (LCD)

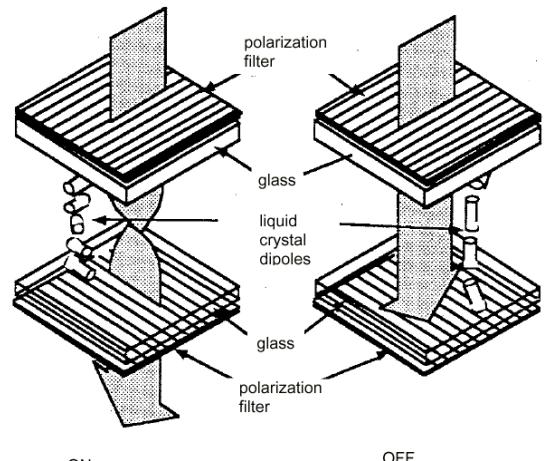

Wolfgang Heidrich




High Dynamic Range Displays

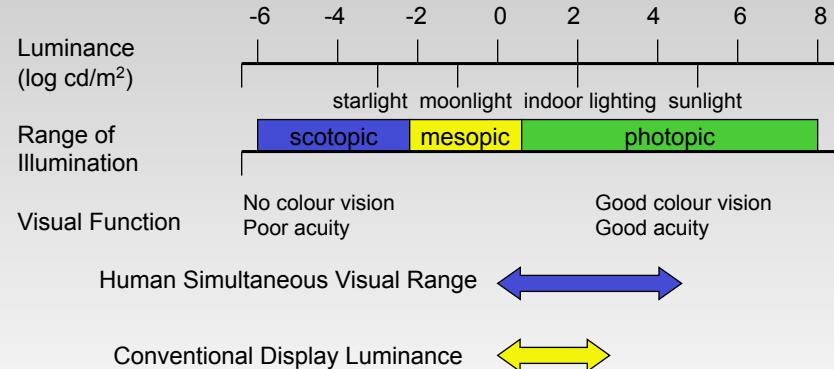

Wolfgang Heidrich



HDR Display Principle

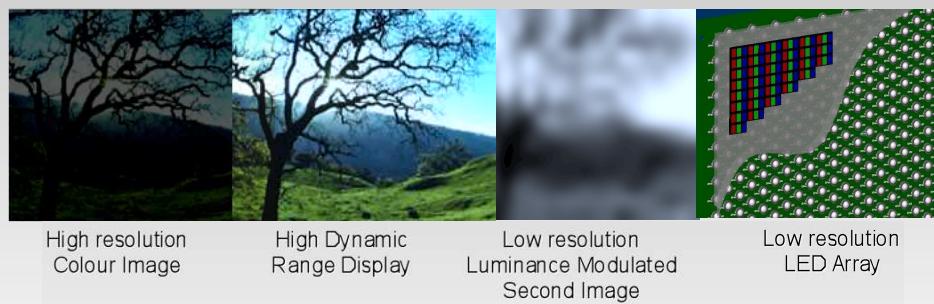

- Modulated LED array
- Conventional LCD
- Image compensation


Wolfgang Heidrich



Prototype Setup: Projector/LCD Panel

Hardware setup:

- Remove backlight from LCD panel
- Shine image from video projector onto back of panel
 - (*Fresnel lens for focusing*)
- Multiplies dynamic range of LCD and projector

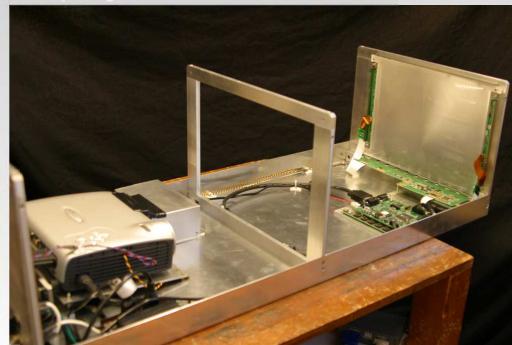

Wolfgang Heidrich

Measured:

- Contrast: 50,000:1
- Intensity: 2,700 cd/m²

Brightside Technologies / Dolby Commercial Display



18" prototype:
Zeetzen 5



37" commercial prototype
DR-37P



LG Philips - “Local Area Luminance Control”



47-inch LED Backlight System

High Color Gamut and Local Area Luminance Control

- Active Area : 1039.68 (H) X 584.82 (V) mm
- Resolution : 1920 X RG8 X 1080
- Pixel Density : 47 ppi
- Number of Colors : 1.07 Billion
- Color Gamut : 105 %
- Color Temperature : 10,000 K
- Luminance : 500 cd/m²
- Contrast Ratio : Mega CR
- Display Mode : S-IPS
- Viewing Angle : 178°, 178° (U,D, R,L)
- Response Time : 8 ms (GTG*)
- Power Consumption : < 200 W @ Dynamic

*GTG = gray-to-gray
AVING.news
LG.PHILIPS LCD

Coming Up...



Friday:

- Geometric Transformations (Affine)

Next week:

- Geometric Transformations (Perspective)

Wolfgang Heidrich