

Computer Graphics

Hidden Surface Removal


Chapter 10

Hidden Surface Removal/
Depth Test

Occlusion

- For most interesting scenes, some polygons overlap


- To render the correct image, we need to determine which polygons occlude which

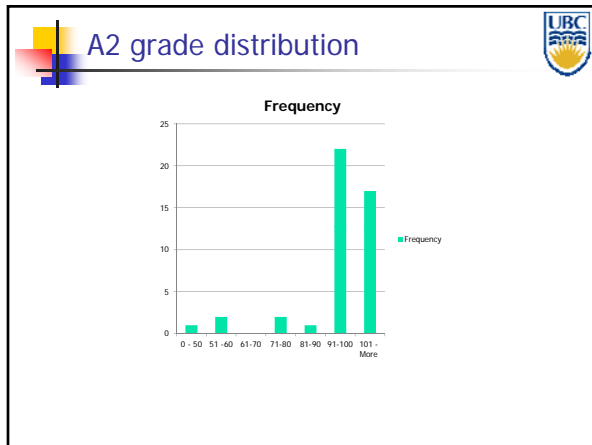

Painter's Algorithm

- Simple: render the polygons from back to front, "painting over" previous polygons

- Draw cyan, then green, then red
- Will this work in general?

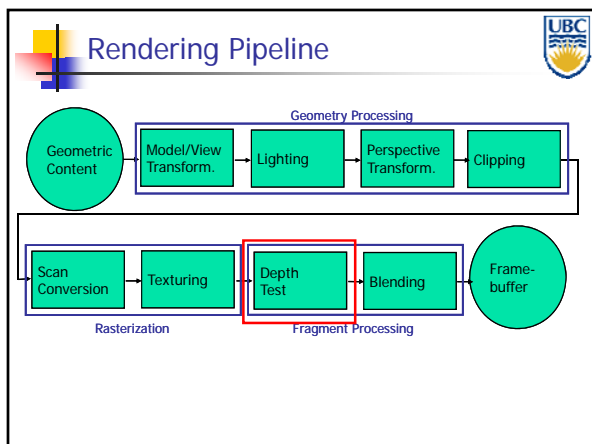

Painter's Algorithm: Problems

- Intersecting polygons present a problem
- Even non-intersecting polygons can form a cycle with no valid visibility order:

Computer Graphics

Hidden Surface Removal

Hidden Surface Removal


- Object Space Methods:
 - Work in 3D before scan conversion
 - E.g. Painter's algorithm
 - Usually independent of resolution
 - Important to maintain independence of output device (screen/printer etc.)
- Image Space Methods:
 - Work on per-pixel/per fragment basis after scan conversion
 - Z-Buffer/Depth Buffer
 - Much faster, but resolution dependent

The Z-Buffer Algorithm

- Augment color framebuffer with Z-buffer
 - Also called depth buffer
 - Stores z value at each pixel
 - At frame beginning, initialize all pixel depths to ∞ (depth = far)
- When scan converting: interpolate depth (z) across polygon
- Check z-buffer before storing pixel color in framebuffer and storing depth in z-buffer
 - don't write pixel if its z value is more distant than the z value already stored there

The Z-Buffer Algorithm

- What happens if multiple primitives occupy the same pixel on the screen?
- Which is allowed to paint the pixel?

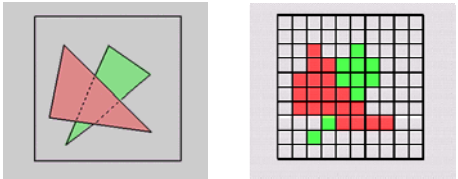

Z-Buffer

- Store (r,g,b,z) for each pixel
 - typically 8+8+8+24 bits, can be more


```
for all i,j {
  Depth[i,j] = MAX_DEPTH
  Image[i,j] = BACKGROUND_COLOUR
}
for all polygons P {
  for all pixels in P {
    if (Z_pixel < Depth[i,j]) {
      Image[i,j] = C_pixel
      Depth[i,j] = Z_pixel
    }
  }
}
```

The Z-Buffer Algorithm

- Idea: retain depth after projection transform
 - Each vertex maintains z coordinate
 - Relative to eye point
 - Can do this with canonical viewing volumes

Interpolating Z

- Use barycentric coordinates
 - Interpolate z like other parameters
 - E.g. color
 - Use on of three formulas shown
 - Plane/edge walk/barycentric



Computer Graphics

Hidden Surface Removal

The Z-Buffer Algorithm (mid-70's)

- History:
 - Object space algorithms were proposed when memory was expensive
 - First 512x512 framebuffer was >\$50,000!
- Radical new approach at the time
 - The big idea:
 - Resolve visibility independently at each pixel

Depth Test Precision

- Low precision can lead to **depth fighting** for far objects
 - Two different depths in eye space get mapped to same depth in framebuffer
 - Which object "wins" depends on drawing order and scan-conversion
- Gets worse for larger ratios $f:n$
 - Rule of thumb: $f:n < 1000$ for 24 bit depth buffer
- With 16 bits cannot discern cm differences in objects at 1 km distance

Depth Test Precision

- Reminder: projective transformation maps eye-space z to generic z -range (NDC)
- Simple example:

$$T \begin{pmatrix} x \\ y \\ z \\ 1 \end{pmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & a & b \\ 0 & 0 & -1 & 0 \end{bmatrix} \begin{pmatrix} x \\ y \\ z \\ 1 \end{pmatrix}$$
- Thus:

$$z_{NDC} = \frac{a \cdot z_{eye} + b}{z_{eye}} = a + \frac{b}{z_{eye}}$$

Z-Buffer Algorithm Questions

- How much memory does the Z-buffer use?
- Does the image rendered depend on the drawing order?
- Does the time to render the image depend on the drawing order?
- How does Z-buffer load scale with visible polygons? with framebuffer resolution?

Depth Test Precision

- Therefore, depth-buffer essentially stores $1/z$, rather than z !
- Issue with **integer** depth buffers
 - High precision for near objects
 - Low precision for far objects

Z-Buffer Pros


- Simple!!!
- Easy to implement in hardware
 - Hardware support in all graphics cards today
- Polygons can be processed in arbitrary order
- Easily handles polygon interpenetration

Computer Graphics

Hidden Surface Removal


Z-Buffer Cons

- Poor for scenes with high depth complexity
 - Need to render all polygons, even if most are invisible
- Shared edges/overlaps handled inconsistently
 - *Ordering dependent*



BSP Trees: Idea

- For any plane (3D) objects on the *same* side of plane as viewer CANNOT be occluded by objects on other side
- Idea:
 - Recursively split space by planes
 - Traverse resulting tree to establish rendering order
 - Test eye location w.r.t. each plane



Z-Buffer Cons

- Requires "lots" of memory
 - (e.g. 1280x1024x32 bits)
- Requires fast memory
 - Read-Modify-Write in inner loop
- Hard to simulate transparent polygons
 - We throw away color of polygons behind closest one
 - Works if polygons ordered back-to-front
 - Extra work throws away much of the speed advantage


Creating BSP Trees: Objects



Object Space Algorithms

- Determine visibility on object or polygon level
 - Using camera coordinates
- Resolution independent
 - Explicitly compute visible portions of polygons
- Early in pipeline
 - After clipping
- Requires depth-sorting
 - Painter's algorithm
 - BSP trees

Creating BSP Trees: Objects

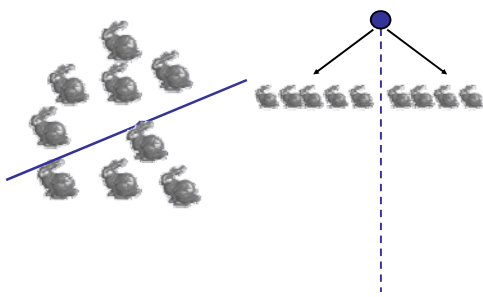

Computer Graphics

Hidden Surface Removal

Creating BSP Trees: Objects

Splitting Objects

- No bunnies were harmed in previous example
- But what if a splitting plane passes through an object?
 - Split the object; give half to each node

Creating BSP Trees: Objects

Traversing BSP Trees







- Tree creation independent of viewpoint
 - Preprocessing step
- Tree traversal uses viewpoint
 - Runtime, happens for many different viewpoints

Creating BSP Trees: Objects

BSP Trees : Viewpoint A

Computer Graphics

Hidden Surface Removal

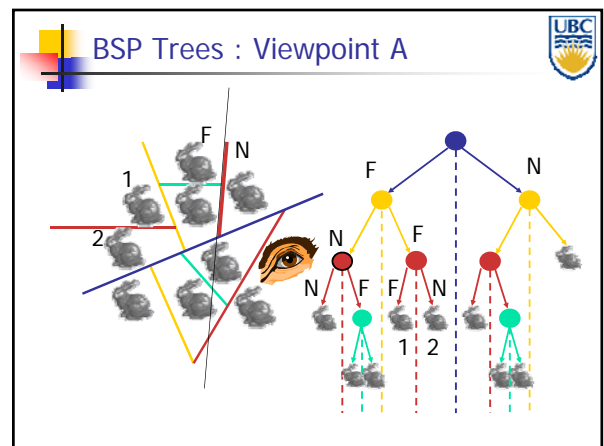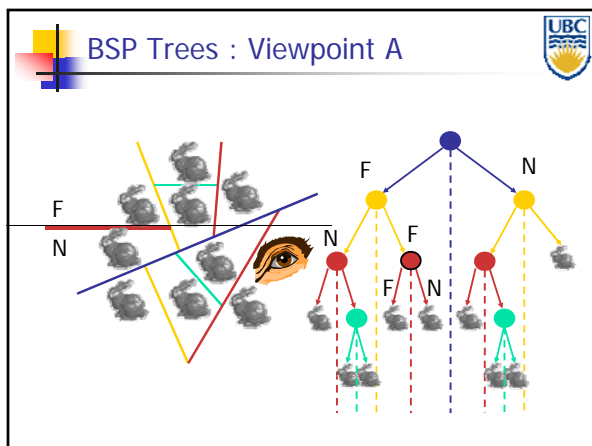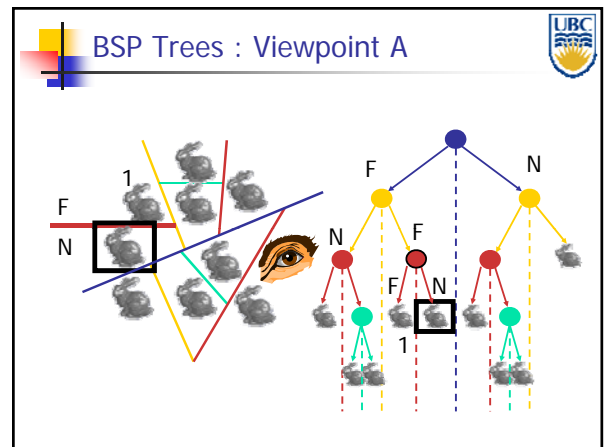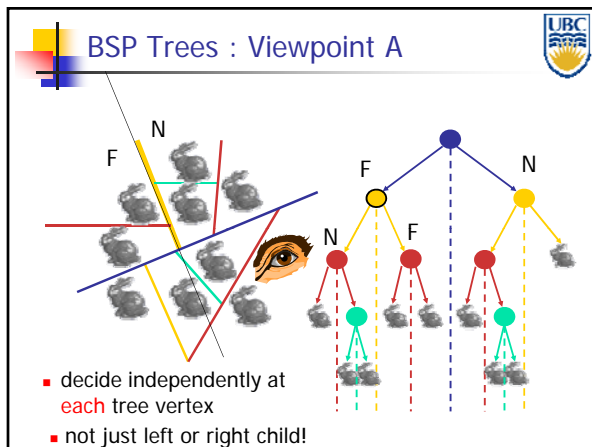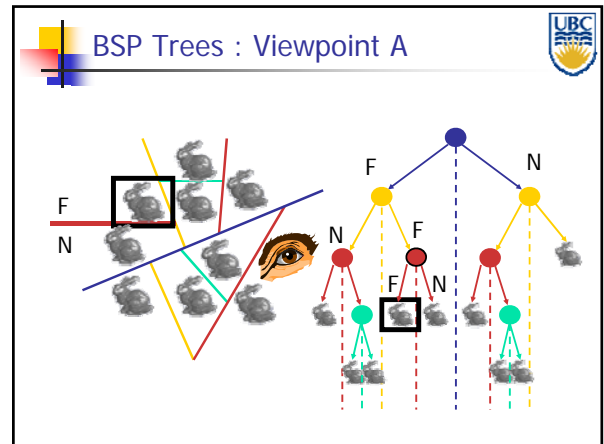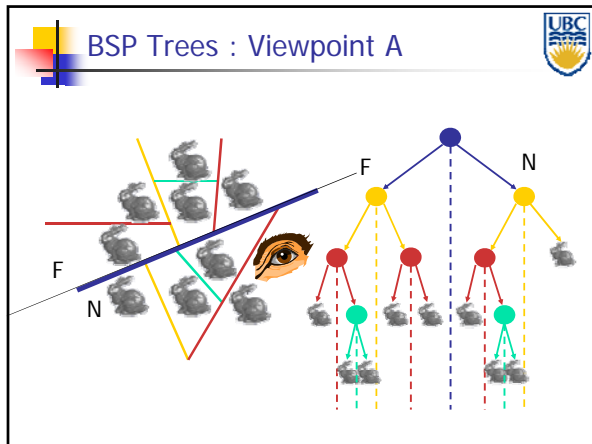

Computer Graphics

Hidden Surface Removal

Traversing BSP Trees

- Each plane divides world into near and far
 - For given viewpoint, decide which side is near and which is far
 - Check which side of plane viewpoint is on independently for each tree vertex
 - Tree traversal differs depending on viewpoint!
 - Recursive algorithm
 - Recurse on far side
 - Draw object
 - Recurse on near side

BSP Trees : Viewpoint B

Traversing BSP Trees

```

renderBSP(BSPtree *T)
    BSPtree *near, *far;
    if (eye on left side of T->plane)
        near = T->left; far = T->right;
    else
        near = T->right; far = T->left;
    renderBSP(far);
    if (T is a leaf node)
        renderObject(T)
    renderBSP(near);
    
```

BSP Tree Traversal: Polygons

- Split along the plane defined by any polygon from scene
- Classify all polygons into positive or negative half-space of the plane
 - If a polygon intersects plane, split polygon into two and classify them both
- Recurse down the negative half-space
- Recurse down the positive half-space

BSP Trees : Viewpoint B

BSP Demo


- Useful demo:
 - <http://symbolcraft.com/graphics/bsp>

Copyright Alla Sheffer
 UBC 2012

Summary: BSP Trees

- Pros:
 - Simple, elegant scheme
 - Fast runtime evaluation
- Cons:
 - Computationally intense preprocessing stage
 - $O(n \log n)$ to split, sort
 - Splitting increases polygon count: $O(n^2)$ worst-case
- Good for static scenes (where prep cost is amortized)
- Still very popular for video games
- Useful for tasks like RayTracing

Back Face Culling (object space)

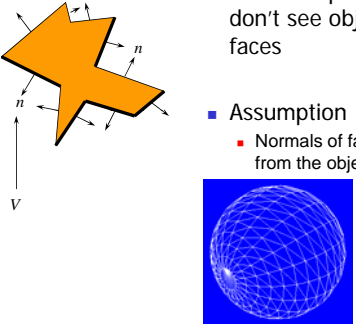

- In closed polyhedron you don't see object "back" faces
- Assumption
 - Normals of faces point out from the object

Back Face Culling

- Determine back & front faces using sign of inner product nv
$$n \cdot v = n_x v_x + n_y v_y + n_z v_z = \|n\| \cdot \|v\| \cos \theta$$
- In a convex object :
 - Invisible back faces
 - All front faces entirely visible \Rightarrow solves hidden surfaces problem
- In non-convex object:
 - Invisible back faces
 - Front faces can be visible, invisible, or partially visible