University of British Columbia

Chapter 13

Geometric Modeling
Part II: Meshes & Subdivision




Meshes

- Simplest boundary representation – polygonal mesh
- Properties
  - Triangular/Quad
  - Manifold
- Simplicity of representation & manipulation
- Base representation for scanned data
- Input to hardware rendering algorithms (Z-buffer, polygon fill,etc..
- Manipulation algorithms well defined (computational geometry)

University of British Columbia

Processing

- Construction
  - From scans
  - From free-form/volumetric data
- Compression – typical meshes are very large due to
  - Origin (scan)
  - Required LOD
- Manipulation
  - Note: No (u,v) parameterization
- Smoothing
  - Simulate via lighting methods
  - Refine - subdivision


424K


1K

University of British Columbia

Subdivision Curves and Surfaces

- Subdivision – given polyline/polygon/polyhedron recursively modify its vertices to achieve smooth curve

University of British Columbia

Corner Cutting



University of British Columbia

Corner Cutting



University of British Columbia

Corner Cutting



University of British Columbia

Corner Cutting



University of British Columbia

Corner Cutting



University of British Columbia

Corner Cutting



University of British Columbia

Corner Cutting



University of British Columbia

Corner Cutting



University of British Columbia

Corner Cutting

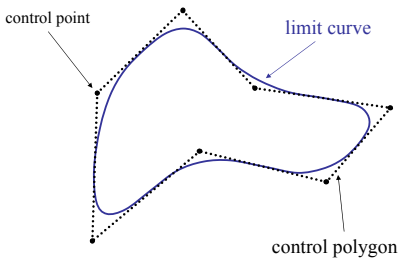

University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme



University of British Columbia

The 4-point scheme

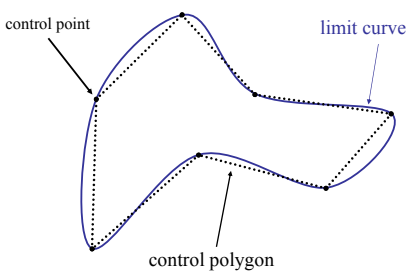

University of British Columbia

Subdivision curves



University of British Columbia

Basic concepts of Subdivision

- Subdivision curve generated by repeatedly applying subdivision operator to given polygon
- Each iteration
  - Increase number of vertices (approximately) * 2
- Initial polygon - control polygon
- Central questions:
  - Convergence: Given a subdivision operator and a control polygon, does the subdivision process converge?
  - Smoothness: Does subdivision converge to smooth curve?

University of British Columbia

Subdivision schemes for surfaces

- Each iteration
  - Subdivision refines *control net* (mesh)
  - Increase number of vertices (approximately) * 4
- Mesh vertices converge to limit surface
- Every subdivision method has:
  - Method to generate net topology
  - rules to calculate location of new vertices

University of British Columbia

Triangular subdivision

- Works only for triangular meshes (control nets)

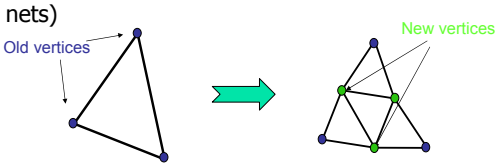

- Every face replaced by 4 new triangular faces
- Two kinds of new vertices:
  - Green vertices are associated with old edges
  - Blue vertices are associated with old vertices

University of British Columbia

Loop's scheme

- New vertex = weighted average of old vertices
- List of weights - subdivision mask or stencil
  - Rule for new blue vertices (*n* – vertex valence)



  - Rule for new green vertices



$$w_n = \frac{64n}{40 - (3 + 2\cos(2\pi/n))^2} - n$$

University of British Columbia

The original control net



University of British Columbia

After 1st iteration



University of British Columbia

After 2nd iteration



University of British Columbia

After 3rd iteration



University of British Columbia

The limit surface



- Limit surfaces of Loop's subdivision is C^2 almost everywhere

University of British Columbia

Butterfly scheme

- Interpolatory scheme
- New blue vertices inherit location of old vertices
- New green vertices calculated by following stencil:



University of British Columbia

The original control net



University of British Columbia

After 1st iteration



University of British Columbia

After 2nd iteration



University of British Columbia

After 3rd iteration



University of British Columbia

The limit surface

- Limit surfaces of Butterfly subdivision are C^1, but do not have second derivative

University of British Columbia

Comparison

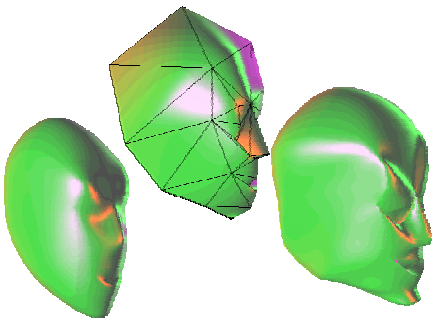

University of British Columbia

Properties

- Require regular connectivity (valence 6) to work well
- Easy to implement (efficiency…)
- Local support
- Allow LOD
- Continuous

University of British Columbia

Drawbacks

- Not always intuitive
- Can have artifacts
- Hard to control



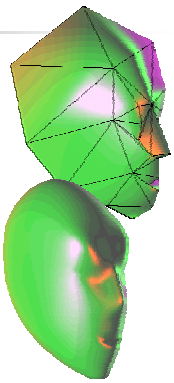

University of British Columbia